



Energy Strategy Statement

Bloor Homes

Willen Road, Newport Pagnell

1. Executive Summary

Bloor Homes has instructed Briary Energy to prepare this document, which examines the feasibility of suitable Low to Zero Carbon (LZC) sources, high-efficiency alternative systems, and low carbon energy efficiency measures.

The Willen Road, Newport Pagnell development will comprise of up to 800 dwellings. The developer will first ensure a Building Regulation compliant carbon reduction across all dwellings through fabric measures, before assessing LZC technologies where appropriate.

The energy consumption figures for the development will be based on benchmark figures for each building type from SAP 2012, and include regulated and non-regulated emissions.



1.1. Local Policy

Plan:MK 2016 - 2031, Policy SC1 - Sustainable Construction states -

A. Development proposals will be required to demonstrate how they have implemented the principles and requirements set out below. With the exception of requirements K.2/3/5, non-residential development of 1000 sq.m or more that is demonstrated to achieve a BREEAM Outstanding rating will not be required to meet the requirements below.

Materials and waste

B. Reuse land and buildings wherever feasible and consistent with maintaining and enhancing local character and distinctiveness.

C. Reuse and recycle materials that arise through demolition and refurbishment, including the reuse of excavated soil and hardcore within the site.

D. Prioritise the use of materials and construction techniques that have smaller ecological and carbon footprints, help to sustain or create good air quality, and improve resilience to a changing climate where appropriate.

E. Incorporate green roofs and/or walls into the structure of buildings where technically feasible to improve water management in the built environment, provide space for biodiversity and aid resilience and adaptation to climate change.

F. Consider the lifecycle of the building and public spaces, including how they can be easily adapted and modified to meet changing social and economic needs and how materials can be recycled at the end of their lifetime.

G. Space is provided and appropriately designed to foster greater levels of recycling of domestic and commercial waste.

1.1 Local Policy - Cont

Energy and Climate

H. Implement the Energy Hierarchy within the design of new buildings by prioritising fabric first, passive design and landscaping measures to minimise energy demand for heating, lighting and cooling.

I. Review the opportunities to provide energy storage and demand management so as to tie in with local and national energy security priorities.

J. The design of buildings and the wider built environment is resilient to the ongoing and predicted impacts of climate change.

K. Development proposals for 11 or more dwellings and non-residential development with a floor space of 1000 sq.m or more will be required to submit an Energy and Climate Statement that demonstrates how the proposal will achieve the applicable requirements below:

1. Achieve a 19% carbon reduction improvement upon the requirements within Building Regulations Approved Document Part L 2013, or achieve any higher standard than this that is required under new national planning policy or Building Regulations.
2. Provide on-site renewable energy generation, or connection to a renewable or low carbon community energy scheme, that contributes to a further 20% reduction in the residual carbon emissions subsequent to 1) above.
3. Make financial contributions to the Council's carbon offset fund to enable the residual carbon emissions subsequent to the 1) and 2) above to be offset by other local initiatives.
4. Calculate Indoor Air Quality and Overheating Risk performance for proposed new dwellings.
5. Implement a recognised quality regime that ensures the 'as built' performance (energy use, carbon emissions, indoor air quality, and overheating risk) matches the calculated design performance of dwellings in 4) above.
6. Put in place a recognised monitoring regime to allow the assessment of energy use, indoor air quality, and overheating risk for 10% of the proposed dwellings for the first five years of their occupancy, and ensure that the information recovered is provided to the applicable occupiers and the planning authority.

Water

L. All newly constructed dwellings will be required to achieve an estimated water consumption of no more than 110 litres/person/day.

M. Water reuse and recycling and rainwater harvesting should also be incorporated wherever feasible to reduce demand on mains water supply, subject to viability. Proposals will be expected to maximise the use of the above measures subject to the outcome of the viability assessment.

1.2 Policy Response

The development will apply the energy hierarchy in order to achieve a 19% improvement over Part L 2013 building regulations, with a further 20% reduction from renewables. Following applying a fabric specification better than building regulation standards, along with efficient services, 1255kWp of PV will be applied across the development to achieve a 39.03% reduction over building regulations.

A financial contribution subject to confirmation of final plot numbers and schedule will be made to the Council's carbon offset fund, based on £200 per tonne of residual CO₂.

As built SAP data and PV schedule will be made available to verify performance against the energy strategy and initial design. Smart metering will be implemented to monitor energy use of dwellings.

A part G water calculation has been carried out detailing how each dwelling will achieve a water use consumption of 110l/p/day. The statement also sets out how the development will prioritise material use with low carbon content and promote recycling.

3. Energy hierarchy through design

The Willen Road, Newport Pagnell development will be developed with the aim of reducing annual energy consumption, whilst providing energy in the most environmentally friendly way to reduce the annual CO₂ footprint.

This strategy has been developed using established methodology (as recommended by CIBSE). It has three stages of priority, seeking to reduce energy use through the cleanest possible solutions.


Be Lean - Reducing energy needs through improved design and construction.

Be Clean - Supply energy efficiently through the use of decentralised energy where feasible.

Be Green - Further reduce CO₂ emissions through the use of on-site renewable sources, where practical.

As this hierarchy demonstrates, designing out energy use is weighted more than the generation of low-carbon or renewable energy to offset unnecessary demand. Applied to the development of new housing, this approach is referred to as ‘fabric first’ and concentrates finance and efforts on improving U-values, reducing thermal bridging, improving airtightness and installing energy efficient ventilation and heating services.

This approach has been widely supported by industry and government for some time, with previous reports from Zero Carbon Hub [1] and Energy Saving Trust [2] having both stressed the importance of prioritising energy demand as a key factor in delivering resilient, low energy homes.

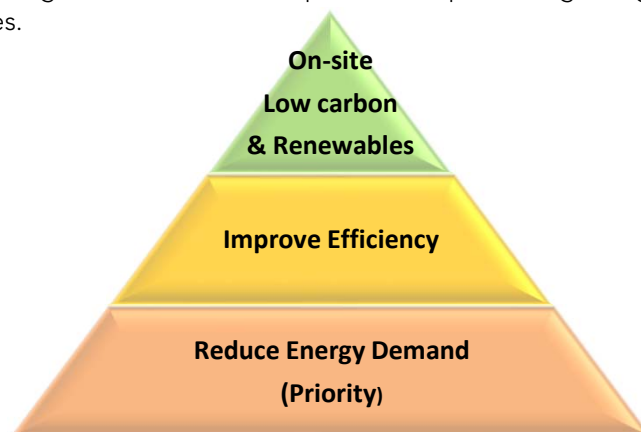

Further to the above methodology, we have also looked at other steps towards achieving a low carbon solution, including:

- The incorporation of passive design solutions by considering the dwellings orientation and layout solutions;
- The incorporation of energy efficiency measures through the design of services and improved fabric performance;
- Calculation of the predicted design energy consumption rates and associated annual CO₂ emissions in comparison with a ‘baseline’ building (using Part L Regulations compliance standards) to include both regulated and un-regulated energy use;
- Assessment of the viability of incorporating low and zero carbon energy sources.

Benefits of the Fabric First Approach	Fabric Energy Efficiency Measures	Bolt on renewable energy technologies
Energy/CO ₂ /fuel bill savings applied to all dwellings	✓	X
Savings built-in for life of dwelling	✓	X
Highly cost-effective	✓	X
Increases thermal comfort	✓	X
Potential to promote energy conservation	✓	✓
Minimal ongoing maintenance / replacement costs	✓	X
Minimal disruption to retrofit post occupation	✓	X

[1] Zero Carbon Hub, Zero Carbon Strategies for tomorrow’s new homes, Feb 2013.

[2] Energy Saving Trust, Fabric first: Focus on fabric and services improvements to increase energy performance in new homes, 2010



4. Be Lean - Energy efficient design measures

Enhancing the thermal performance of the building is usually more cost effective than providing renewable energy, with more reliable CO₂ savings for the long-term life cycle of the building, without the cost of replacing mechanical or electrical components on a continual basis. Adding renewable technology will then maximise these carbon reductions, reducing the quantity required.

This development will achieve compliance with Part L1A of the Building Regulations (2013) without relying upon the contribution of renewable energy.

Element	Building Regulations	Proposed
Ground Floor	0.25 W/m ² k	0.24 W/m ² k
External Wall	0.30 W/m ² k	0.24 W/m ² k
Insulation at Joists	0.20 W/m ² k	0.11 W/m ² k
Insulation at Rafters	0.20 W/m ² k	0.23 W/m ² k
Windows	2.00 W/m ² k	1.30 W/m ² k
Doors	2.00 W/m ² k	1.40 W/m ² k
Air Permeability	10.00 m ³ /hm ² (@50 Pa)	5.01 m ³ /hm ² (@50 Pa)
Thermal Bridges	0.15 ≤ Y	Calculated Constructive Details

Improving the thermal bridge constructive details can have a great impact on the heat loss of the development, in some cases using enhanced details can make as much as a 27% improvement on fabric alone.

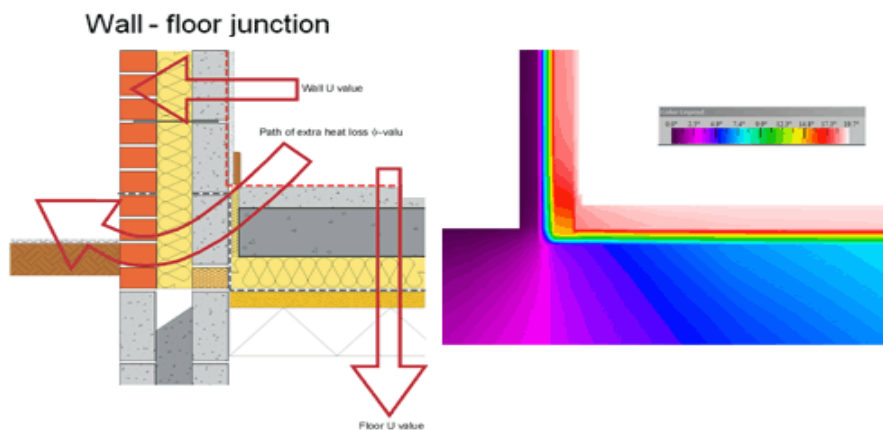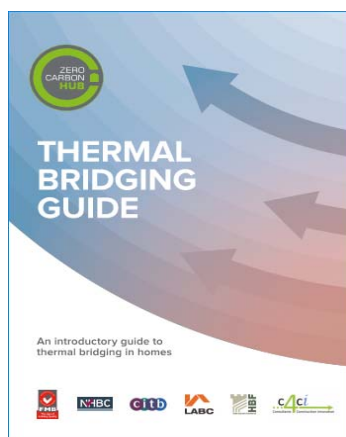


Additional improvements to thermal performance can be achieved by ensuring good practice airtightness targets are achieved. Simple measures like sealing around services (e.g. water, gas and cables), using proprietary seals and collars, ensuring blockwork is sealed and parging layer/plaster finish is applied to external walls before erecting studwork for internal partitions will all improve air tightness results.

5. Be Clean - Energy efficient M & E systems

Having reduced energy demand through the fabric first approach, we now look to specify mechanical and electrical systems with efficiencies that surpass the requirements of the Domestic and Non-domestic Building Services Compliance Guide (2013).

FACTORS THAT INFLUENCE ENERGY CONSUMPTION

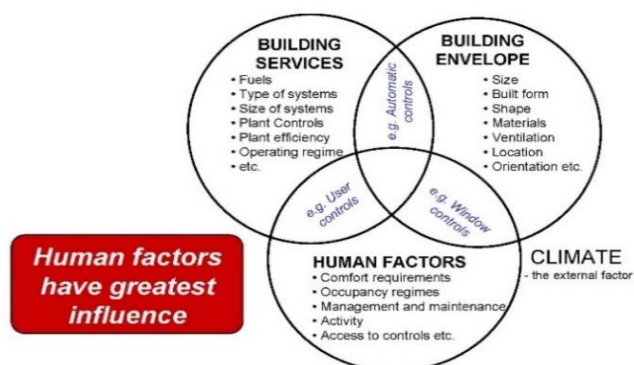

The following energy efficient systems are proposed. This covers the clean mechanical and electrical systems, HVAC (heating, ventilation, air conditioning), hot water, lighting and efficient controls. Some renewable factors may be considered and included at this stage, i.e.: heat recovery, air source heat pumps or ground source heat pumps. The suitability of such technologies will be explored further within this report.

Element	Compliance	Proposed
Low energy lighting (efficacy $\geq 45\text{lm/W}$)	75%	100%
Ideal ESP1	88%	89.6%
Shower Save (WWHRS)	N/A	N/A
Hot Water Cylinder - 300 / 210L	2.86 / 2.3 kWh/day	2.04 / 1.49 kWh/day
Heating controls	Programmer, TRV's & room stats	Time & Temp Zone controls (over 150m ²)
Advanced controls	N/A	delayed start
System 3 - Continuous Mechanical Extract / System 1 - Natural Ventilation	0.7 l/W/s (SFP) / 0.5 l/W/s (SFP)	0.5 / 0.2 l/W/s (SFP)

6. District Heating

As part of planning, any major development proposal should evaluate feasibility of energy systems in accordance with the following hierarchy: -

- Connection to existing heating and cooling networks;
- Site wide combined heat and power (CHP) network;
- Communal heating and cooling.


Over several years, building service engineers Max Fordham have studied the benefits and drawbacks of providing heat to buildings via hot water heat networks supplied from community scale heat sources, in particular combined heat and power (CHP). Government scenario planning includes predictions that by 2050 heat networks may supply about 20% of the UK's building heat demand [D. o. E. & C. Change, "National Energy Efficiency Data-Framework (NEED) report: Summary of analysis 2013 Part 1," DECC, 2013.]. It is clear that government policy is vigorously pursuing gas fired CHP with heat networks, but to what effect?

The issues are varied and complex, and include: consideration of the heat sources that may be in use in the future; the future strategy for national electricity generation; the difference between "as predicted" and "as measured"; the relationship to the intensity of heat demand; and the costs to the end users.

The most important aspect that Max Fordham concluded is that the heat network system heat losses are very large. They are much larger than the assumed values used in regulatory and system planning calculation methods (such as SAP).

An unfortunate feature of this (district heating) debate is that good quality data from a wide range of UK installations is not available or not publishable due to its commercially sensitive nature. Clearly this situation is not helping the UK develop a low carbon heat strategy.

However, data from the Danish District Heating Association shows that from analysis of about 100 installations the heat losses in the municipal distribution pipes ranged from 15% to 45% of the heat supplied. This is only the loss up to the building site boundaries. There will be additional losses inside the buildings too. The current UK average domestic heat demand is 14MWhr/dwelling/yr. [D. o. E. a. C. Change, "National Energy Efficiency Data-Framework (NEED) Summary consumption statistics," DECC, 2011.]. At this scale the Danish data shows that a heat loss of around 35%. If the heat demand from buildings is reduced to less than 10 MWh/yr. (which is desirable) then the heat losses might represent 50% of the heat supplied.

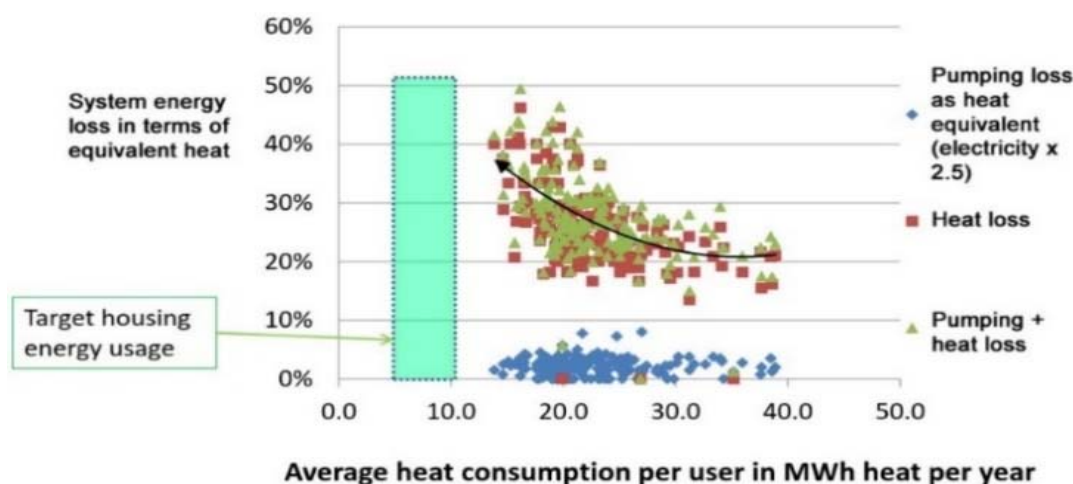

Danish data of heat and pumping losses in district heating systems. Source: Birger Lauersen, International chef / Manager International Affairs, Dansk Fjernvarme / Danish District Heating Association

District Heating - Continued

High system heat losses (and pumping demands) mean that in many cases, gas fired CHP with heat networks will not reduce, but increase carbon emissions. This is particularly true when compared to using individual gas boilers and electricity from the current national grid. It is clear that heat networks need to be reassessed (by the UK Government) taking into account the true extent of heat losses and/or the mitigation measures required to reduce them. If this is done, we may well see quite a change in national and local policies for heat networks, with or without CHP.


Our preference has always been a much more vigorous pursuit of heat demand reduction, principally by insulating and draught proofing existing buildings. From our observations of district heating systems we believe that the very high losses can be reduced with improved components, improved design and improved care during installation. However, it is highly unlikely that the system losses could be reduced to the levels that have informed current government policy anytime soon.

The development will not connect to any existing district heating system, nor will a new system be considered, for the following reasons:


- the site is mainly residential, with units dispersed over a large area. This will mean that a large distribution network would be required, and it is anticipated that distribution losses would be high.
- the carbon reduction and energy efficiency requirements can be achieved at a lower cost, and at a greater benefit to the homeowner the 'fabric first' approach is proposed.
- the site is too far away from existing District Heat networks.
- the home owners would be tied to the same supplier, removing choice.
- The statement on the previous page outlines why CHP and district heating systems are generally more expensive to run, consume more energy and issue more CO₂ than an equivalent "conventional" systems.

7. Low to Zero Carbon Technology Reductions

In order to satisfy local planning requirements, a detailed assessment of Low to zero carbon technologies will be carried out. Each energy efficiency measure has been considered to give a greater understanding of which solutions could be implemented at the development to provide energy and CO₂ savings beyond current building regulations. Feasibility is based on location, cost, payback for both initial payment and ongoing maintenance and suitability

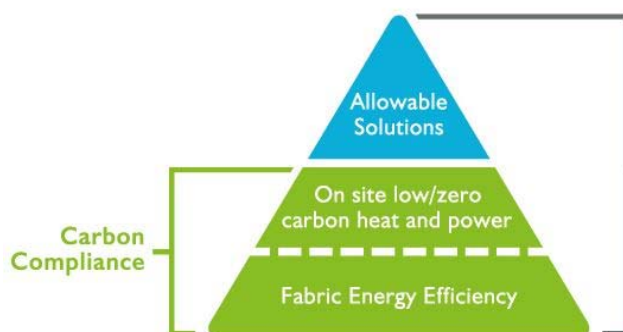

Zero Carbon

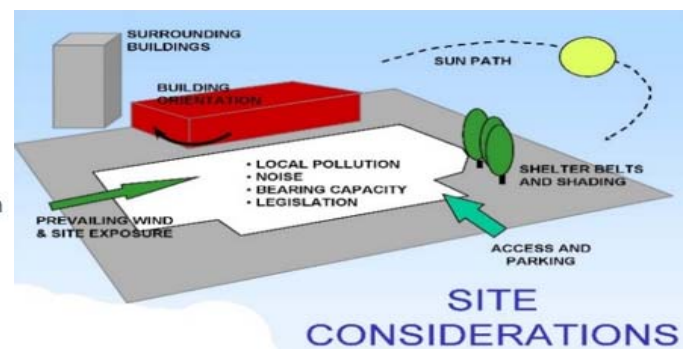

Technologies Not Considered within following feasibility study -

- **Fuel Cells** : These are not yet fully commercially available
- **Hydro** : Small scale hydro would be inappropriate for integration into the proposed development due to the geographical location of the proposed site
- **CHP, Biomass and Biogas District heating**: These have been discounted under the District Heating Scheme section

Low to Zero Carbon Technology Reductions - cont.

7.1. Solar Hot Water

Solar water heating systems use heat from the sun to work alongside conventional primary water heaters. The technology is well developed with a large choice of equipment to suit many applications. There are three main components.

Solar collectors - fitted to the roof and collect heat from the sun's radiation. There are 2 main types of collector:

- Flat plate systems: comprised of an absorber plate with a transparent cover to collect the sun's heat
- Evacuated tube systems: comprised of a row of glass tubes that each contain an absorber plate feeding into a manifold which transports the heated fluid.

Heat transfer system - uses the collected heat to heat water

Hot water cylinder - stores the hot water that is heated during the day and supplies it for use later.

All savings are approximate and are based on the hot water heating requirements of a 3 bed semi detached home. Solar water heating can be used in the home or for larger applications. A domestic system would typically require 3-4 square metres of southeast to southwest facing roof receiving direct sunlight for the main part of the day and space to locate an additional water cylinder.

installation and maintenance costs - The typical installation cost for a domestic system is £3,000- £5,000. Evacuated tube systems are more advanced in design than flat plate, and so tend to be more expensive. Solar water heating systems generally come with a 5-10 year warranty. A yearly check by the householder and a more detailed check by a professional installer every 3-5 years should provide sufficient maintenance.

Proposed for this development?

No



Solar Thermal Calculation

Number of plots with panels	0
Size of Panel	4.5
Number of Panels per plot	0
Total m ²	0
Average kWh/m ²	294
Energy produced by panels	N/A
Energy% Saved From Panels	N/A
CO ₂ % Saved From Panels	N/A

Not Proposed for this development because...

- Solar Thermal relies on energy from the sun, therefore producing hot water only during daylight hours
- Poor servicing and badly programmed controls can make this technology operate less efficiently than a standard boiler
- Hot water storage has a heat loss linked to it, which can contribute to summer overheating and reduced efficiency
- This is not a 'fit and forget' technology, it requires regular servicing, replacement parts and optimizing of controls
- This is not suitable for poorly orientated dwellings
- Solar thermal is predominantly not feasible for dwellings with combination boilers

7.2. Photovoltaic Collectors (PV)

Solar PV panels create electricity to run appliances and lighting from natural daylight (direct sunlight is not required) to generate electricity.

How it works

Photovoltaic cells convert solar radiation into electricity. The PV cell consists of one or two layers of a semi conducting material, usually silicon. When light shines on the cell it creates an electric field across the layers, causing electricity to flow. The greater the intensity of the light, the greater the flow of electricity. PV systems generate no greenhouse gases, saving approximately 325kg of carbon dioxide emissions per year- adding up to about 8 tonnes over a system's lifetime for each kilowatt peak (kWp). PV cells are referred to in terms of the amount of energy they generate in full sun light.

PV arrays come in a variety of shapes and colours, ranging from grey 'solar tiles' that look like roof tiles, to panels and transparent cells that you can use on conservatories and glass to provide shading as well as generating electricity. As well as enabling you to generate free electricity they can provide an interesting alternative to conventional roof tiles.

PV performs optimally with a roof or wall that faces within 90 degrees of south, as long as no other buildings or large trees overshadow it. If the roof surface is in shadow for parts of the day, the output of the system will decrease. The additional weight of PV will require the roof to be designed accordingly to carry the load. Solar PV installations should always be carried out by a trained and experienced installer. The area of PV required to provide 1kWp is around 6.5m².


Cost and maintenance

Prices for PV systems vary, depending on the size of the system to be installed, type of PV cell used and the nature of the building on which the PV is mounted. The size of the system is dictated by the amount of electricity required. For the average domestic system, costs can be around £1250-£2000 per kWp installed (energy saving trust 2017), with most domestic systems usually between 1.5 and 2 kWp. Solar tiles cost more than conventional panels, and panels that are integrated into a roof are more expensive than those that sit on top. Grid connected systems require very little maintenance, generally limited to ensuring that the panels are kept relatively clean and that shade from trees has not become a problem.

The wiring and components of the system should however be checked regularly by a qualified technician. Stand-alone systems, i.e. those not connected to the grid, need maintenance on other system components such as batteries.

Proposed for this development?

Yes

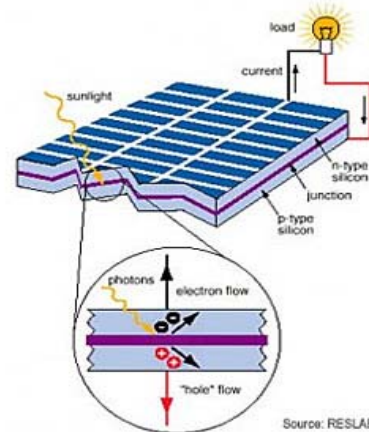

Source: RESLAB



Photovoltaic Collectors (PV) - continued

Proposed for this development?


Yes

In determining the feasibility of Solar PV, energy output will be calculated through the equation - $E = A \times r \times H \times PR$, detailed below.

Loss details (dependent on site, technology, and sizing of the system)

Inverter losses	4%
Temperature losses	3%
DC cables losses	1%
AC cables losses	1%
Shadings	0%
Losses weak irradiation	1%
Losses due to dust, snow	1%
Other Losses	0%


Yearly sum of global irradiance

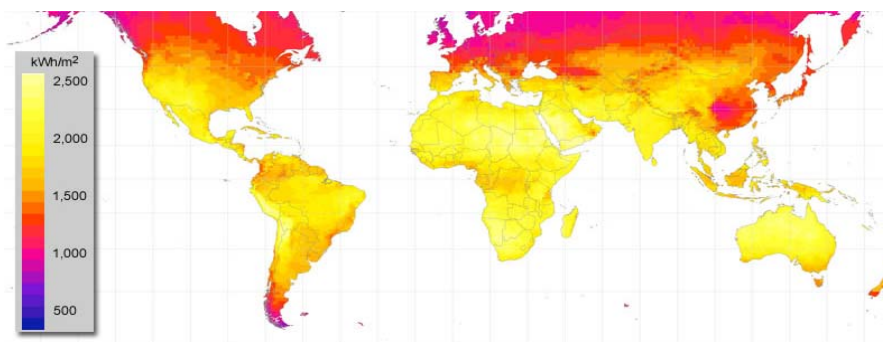

	Total site kWp	PR = Perf Ratio	H = Annual irradiation	r=panel yield(%)	A=Panel Area(m²)	E=Energy (kWh)
South	583	0.89	1054	20%	2915	546,889
SE/SW	672	0.89	997	20%	3360	596,286
East/West	0	0.89	854	20%	0	0.00
NE/NW	0	0.89	686	20%	0	0.00
North	0	0.89	640	20%	0	0.00
	1255				Total Energy kWh	1,143,175

PV Panels required to meet 1255kWp output

240W Panels	5229 Panels Required
250W Panels	5020 Panels Required
270W Panels	4648 Panels Required
300W Panels	4183 Panels Required
330W Panels	3803 Panels Required

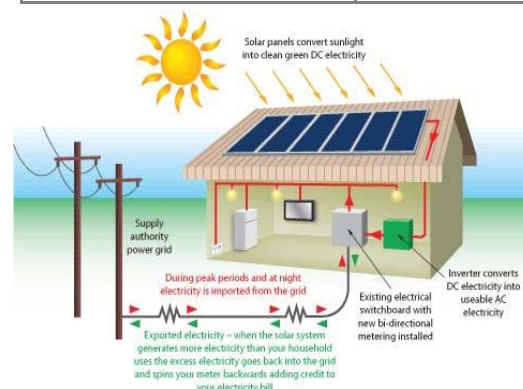

Proposed for this development because...

In order to achieve a 39% carbon improvement (over part L) at Willen Road, Newport Pagnell, 1255kWp of Solar PV will be applied, following initial demand reduction through fabric efficiency measures. The below details the viability of PV for this development -

- Clean, green energy. During electricity generation with PV panels there are no harmful greenhouse gas emissions
- PV panels have no mechanically moving parts, with good quality panels lasting up to 25 years and some inverters lasting as long as 10 years;
- There are direct cost savings to the dwelling occupier, less electricity to buy and often tax credits and other incentives.

7.3. Micro wind turbine

Proposed for this development?

No

Wind turbines use the wind's lift forces to rotate aerodynamic blades that turn a rotor which creates electricity. In the UK we have 40% of Europe's total wind energy.

Most small wind turbines generate direct current (DC) electricity. Systems that are not connected to the national grid require battery storage and an inverter to convert DC electricity to AC (alternating current- mains electricity). Wind systems can also be connected to the national grid. An inverter and controller convert DC electricity to AC at a quality and standard acceptable to the grid. No battery storage is required. Any unused or excess electricity may be able to be exported to the grid and sold to the local electricity supply company.

There are two types of wind turbines -

- Mast mounted - free standing and located near the building(s) that will be using the electricity.
- Roof mounted- can be installed on house roofs and other buildings



Potential Benefits

Wind power is a clean, renewable source of energy which produces no carbon dioxide emissions or waste products. Individual turbines vary in size and power output from a few hundred watts to two or three megawatts (as a guide, a typical domestic system would be 1- 6 kilowatts). Uses range from very small turbines supplying energy for battery charging systems (e.g. on boats or in homes), to turbines on wind farms supplying electricity to the grid.

Not Proposed for this development because...

The Government wind speed database predicts local wind speeds at Willen Road, Newport Pagnell to be 4.5 m/s at 10m above ground level, 5.4 m/s at 25m above ground level and 5.9 m/s at 45m above ground level. This is below the level generally required for commercial investment in large wind turbines.

- Large potential land take, noise pollution and signal interference make a large wind turbine unsuitable for this development
- Horizontal axis micro-wind turbines only reduce carbon emissions by a small amount. High winds can cause the turbine to be stationary
- Health and safety is a factor, with high speed moving parts mechanical failure can be catastrophic to human life, birds and wildlife
- The turbine flicker effect means that the turbine needs to be at least 400 metres from the nearest dwelling and computer controlled to take into account the position of the sun

7.4. Biomass

Biomass is produced from organic materials, either directly from plants or indirectly from industrial, commercial, domestic or agricultural products. It is often called 'bio energy' or 'bio fuels'. It does not include fossil fuels, which have taken millions of years to be created.

Biomass falls into two main categories -

- Woody biomass: includes forest products, untreated wood products, energy crops and short rotation coppice (SRC), which are quick-growing trees like willow.
- Non-woody biomass: includes animal waste, industrial and biodegradable municipal products from food processing and high energy crops. Examples are rape, sugar cane, maize.

Planning


If the building is listed or in an area of outstanding natural beauty (AONB), then you will need to check with your Local Authority Planning Department before a flue is fitted.

Costs and savings

Stand alone room heaters generally cost £2,000 to £4,000, installed. Savings will depend on how much they are used and which fuel is being replaced. A biomass stove which provides a detached home with 10% of annual space heating requirements could save around 840kg of carbon dioxide when installed in an electrically heated home. Due to the higher cost of biomass pellets compared with other traditional heating fuels, and the relatively low efficiency of the stove compared to a central heating system it will cost more to run. The cost for boilers varies depending on the system choice; a typical 15kW (average size required for a three bedroom semi detached house) pellet boiler would cost around £5,000-£14,000, installed, including the cost of the flue and commissioning. A manual log feed system of the same size would be slightly cheaper. A wood pellet boiler could save around £750 a year in energy bills and around 6 tonnes of CO₂ per year when installed in an electrically heated home.

Proposed for this development?

No

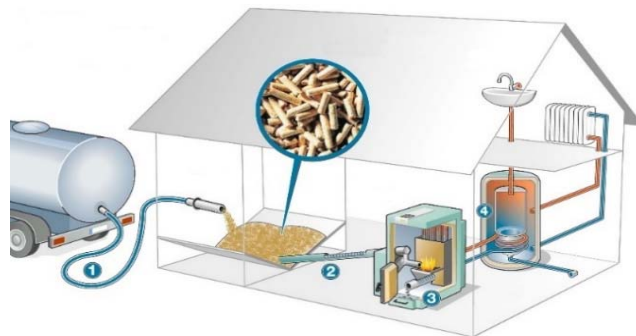

Not Proposed for this development because...

Biomass boilers and and CHP engines create a large amount of pollution and carbon emissions. Although it is considered that Biomass is a carbon neutral technology thanks to the CO₂ being absorbed by growing new trees, it is not viable at the Willen Road, Newport Pagnell development.



- With pollution levels consistently increasing, particulate levels in burning biomass means that it is not a clean technology
- Wood is a major source of biomass energy. Producing biomass fuel on a large scale can lead to deforestation
- Delivering the fuel can lead to additional traffic, causing pollution and delays. Supply needs to be within a 40 mile radius
- By developing crops to produce fuel for biomass energy, we are utilising land that may have been used for food sources

7.5. Heat Pumps (ASHP & GSHP)

Proposed for this development?

No

There are two types of heat pumps, ground source and air source. Heat pumps work in a similar way to fridges and air conditioners and absorb heat from the ground or from the air. Ground Source Heat Pumps (GSHP) and Air Source Heat Pumps (ASHP) are mainly designed to work with under floor heating systems because of the lower design temperatures of under floor systems. The Coefficient of Performance (CoP) of ground source heat pumps can range between 3.5-5.5 and air source between 2.5-4.5.

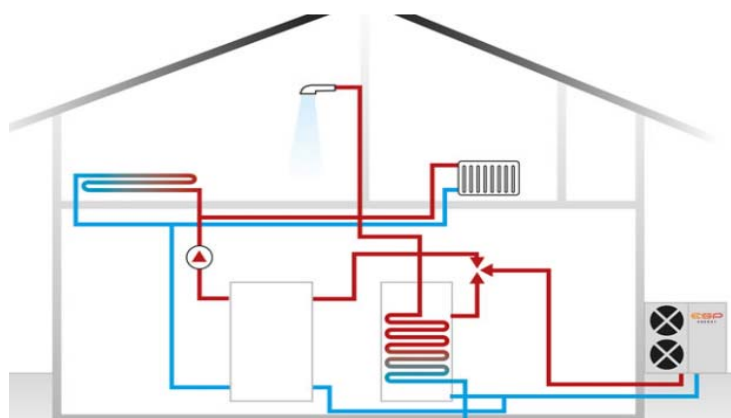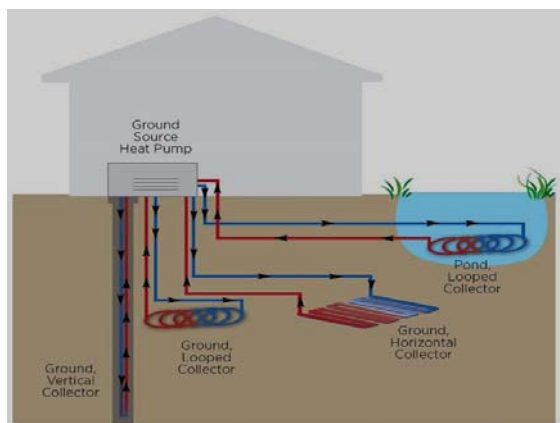

GSHPs require significantly more space to install heating coils, either in trenches or bore holes. This is often not viable within the boundary conditions of a development, nor the space constraints of an urban or suburban dwelling. ASHPs have fewer space constraints, can be more easily installed and offer a shorter payback period.

Commercial buildings and some dwellings can benefit from variable refrigerant flow systems (VRF), which are large-scale ductless HVAC systems that can perform at a high capacity. VRF systems can either be heat pump or heat recovery systems, which provide simultaneous heating and cooling. These systems function in a similar way to an ASHP and when designed correctly they can produce efficiencies in some circumstances outperforming GSHP.

Not Proposed for this development because...

- Each GSHP would require up to 400m² of trench to accommodate the heating coils. The alternate of bore holes would require extensive survey work to determine if there are any existing service networks that may be disrupted. The extensive cost of bore hole drilling and associated works would not be commercially viable for this development.

Heat Pumps will make up a significant proportion of future heating, following the adoption of the Future Homes Standard in 2025. However interim building regulations in place allow for further development of alternate technology to be explored. While it is accepted the Heat Pumps are a solution for the future, the potential for unintended consequences of this have to be carefully considered.

- June 2021 trials by the University of Ulster demonstrated that heat pumps often rely on Immersion heating to top up hot water due to having a longer cylinder recovery period than conventional heating. This led to higher bills for the home owner
- Heat Pump manufacturers anticipate a skill shortage of suitably qualified installers, this will gradually be scaled up towards the Future Homes Standard, but currently can lead to heating solutions that do not run as efficiently as in theory which also leads to higher home owner bills
- Current Grid capacity not suitable for complete adoption of heat pumps

7.6. Flue Gas Heat Recovery Systems (FGHRS)

Proposed for this development?

Yes


FGHRS can provide a reduction in CO₂ emissions compared to some technologies that are classified and listed as LZC technologies yet produce emissions in excess of a Natural Gas energy model.

FGHRS take advantage of the heat within the waste flue gasses resulting from the combustion of gas in the boiler. This recovered heat is used to preheat the cold water entering the boiler, thereby lowering the amount of energy needed to warm the water up to the required temperature. This principle can be applied to mains gas, LPG or oil condensing boilers.

The system requires very little maintenance, with no need for mains electricity. These systems should be planned in early as there are additional space requirements for the FGHRs. Some boilers have the system built in, and in others it takes the form of a "top box". It is important that the specific boiler and FGHRs are compatible so check this with the manufacturer or seek further advice.

FGHRS has no specific land use requirements or additional planning requirements.

FGRS can be either a "wet" or "dry" configuration

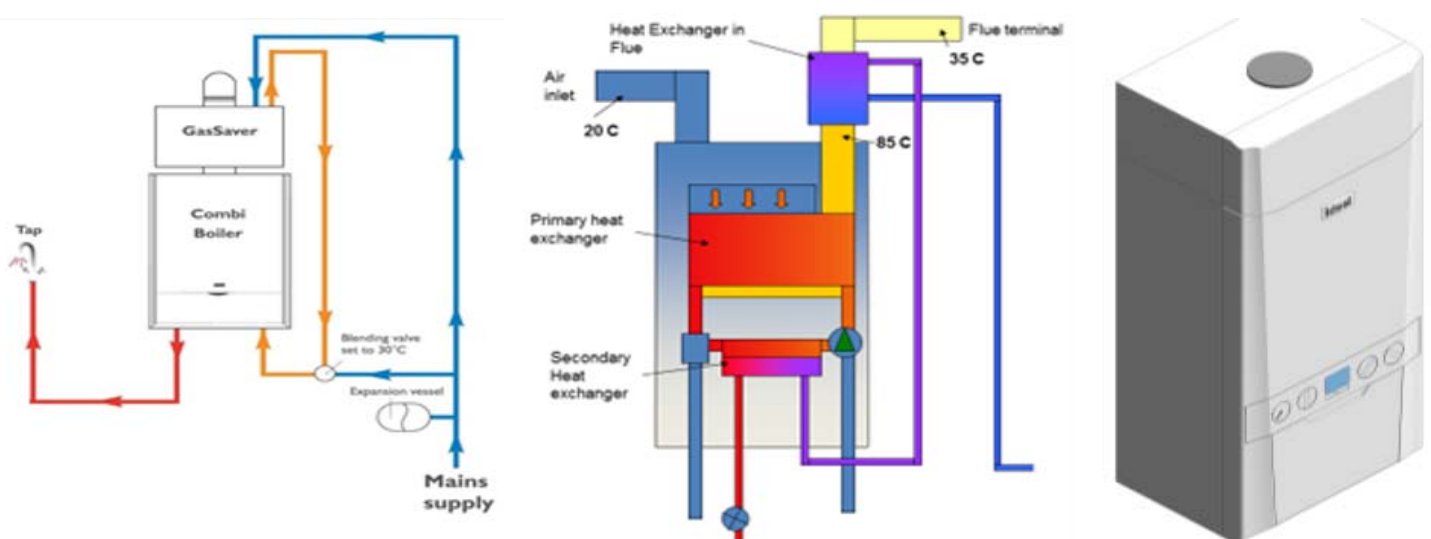

Proposed for this development because...

In order to meet energy demand improvements using Flue Gas Heat Recovery Systems, this site will incorporate Ideal Logic Code Combi ESP1 38 boilers (or similar) installed to 366 dwellings, site wide. Carbon emissions will be reduced by 0.63% compared with Part L 2013 Target Emission Rate, and energy demand reduced by a further 0.67%. Calculated emissions will be incorporated in to the overall carbon and energy reduction, but not included in any calculations specific to renewable energy.

- Can be linked to weather compensation control to further improve efficiency
- Zero maintenance with no auxiliary energy requirements (e.g. mains electricity) for operation
- PFGHRS' has a direct benefit to water efficiency, less time running taps to bring water up to heat can save as much as 6% water usage

7.7. Waste Water Heat Recovery Systems

Proposed for this development?

No

Following Directive (EU) 2018/2001 of the European Parliament and of the Council, 11 December 2018, Waste Water Heat Recovery (WWHR) is defined as a source of renewable energy, stating -


(1) 'energy from renewable sources' or 'renewable energy' means energy from renewable non-fossil sources, namely wind, solar (solar thermal and solar photovoltaic) and geothermal energy, ambient energy, tide, wave and other ocean energy, hydropower, biomass, landfill gas, sewage treatment plant gas, and biogas;

(2) 'ambient energy' means naturally occurring thermal energy and energy accumulated in the environment with constrained boundaries, which can be stored in the ambient air, excluding in exhaust air, or in surface or sewage water;

Shower Save (Figures 1 & 2) Waste Water Heat Recovery Systems (WWHRs) is a Dutch technology, where in The Netherlands, they are fitted to 20% of new dwellings. Although generically classified as a WWHRs, the Shower-Save device is primarily applicable to heat recovery from warm shower waste water.

The most common configuration known as QB-21, is applicable to upstairs showers, whilst the Linear Drain can be used in apartments, bungalows or other single storey properties. The principle of heat recovery is the same in both cases -

- Warm shower water passes through the 'grey' water side of a copper counter-flow heat exchanger
- Mains pressure water simultaneously passes through the fresh water side of the heat exchanger, where it is pre-heated before passing into both the 'cold' inlet of the mixer shower and the 'cold' inlet to the hot water cylinder, combi boiler or other water heater.
- The use of pre-heated water (orange line below) reduces the total volume of hot water required per shower, whilst also pre-heating the cold feed to the hot water heater which increases potential flow rates for combi or shortens the re-heat time of cylinders. The energy saving applies to whichever fuel is used for water heating, which is therefore not limited solely to gas boilers. Whilst technically applicable to instantaneous electric showers, these ARE NOT currently modelled by SAP, so it is not possible to apply in Appendix Q either. WWHRs does not save energy from baths, in which hot water use is in advance of grey water disposal, but it is applicable to the shower over a bath.

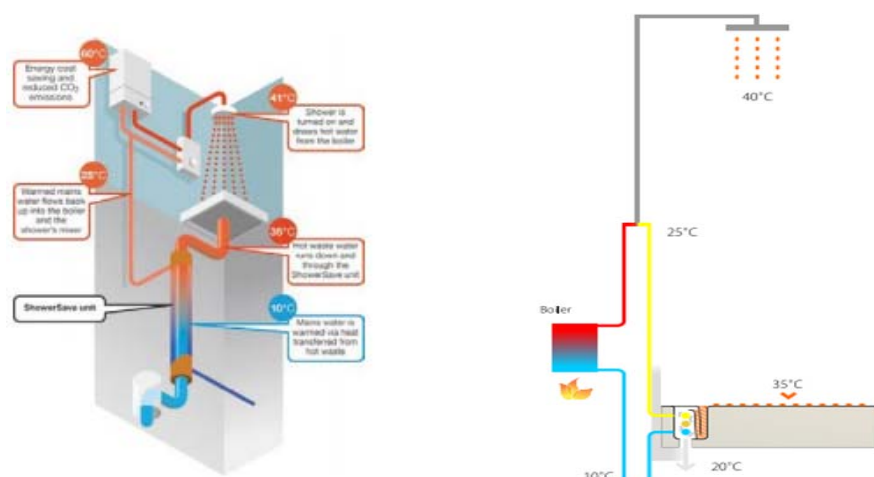

Not Proposed for this development because...

It is not viable due to construction constraints to install WWHRs to this development, for the following reasons: -

- Although WWHR can be installed on ground floor and single story dwellings, the devices are less efficient, providing reduced carbon and energy savings
- Multiple shower and SVP locations require multiple WWHRs devices, in each instance reducing system efficiency

8. Baseline Energy Calculations

A baseline total energy demand has been established for the development. Reductions in demand due to energy conservation measures are considered and form the basis of the renewable energy strategy which follows.

Total floor areas for the Willen Road, Newport Pagnell development have been used in conjunction with the building specification to determine total energy demand and associated carbon emissions using the methodology as set out in Part L1A 2013, calculated using approved SAP 2012 software.

Savings are measured in terms of a reduction in CO₂ emissions and kWh, which are calculated from their association with a particular fuel source. CO₂ conversion factors have been taken from the approved DEFRA Carbon Factors 2017 DECC conversion (cF)¹.

Activity	Fuel	Unit	Energy - Gross CV	
Electricity Generated	Electricity	kWh	0.35156	kg CO ₂ e
Gaseous Fuels	Natural Gas	kWh	0.18416	kg CO ₂ e
Biomass	Wood Pellets	kWh	0.01270	kg CO ₂ e

9. Milton Keynes Carbon Offset Fund

Policy SC1 of Plan:MK requires developments of 11 or more dwellings to make financial contributions to the Council's carbon offset fund to enable the residual carbon emissions to be offset by other local initiatives. A one-off contribution will be required to the carbon offset fund, at a rate of £200 for each tonne of carbon dioxide. The exact financial contribution will be calculated and submitted to the council subject to confirmation of final plot numbers.

10. Renewable energy technology summary

The below table summarises the proposed Low/Zero carbon technologies that will be applied to the site, following the assessment of viability of each technology.

Potentially viable energy strategies considered	Number of Dwellings Applied to	Energy Saved %	Carbon Saved %	Proposed?
Solar hot water	0	0	0	No
Solar Photovoltaic (Approx.)	502	19	34.2	Yes
Wind Turbines	0	0	0	No
ASHP	0	0	0	No
GSHP	0	0	0	No
Flue Gas Heat Recovery ¹	366	0.7	0.6	Yes
Waste Water Heat Recovery	0	0	0	No
Fabric Approach	800	5.2	4.8	Yes

1. Passive FGHR included in overall fabric results and does not therefore demonstrate additional savings

11. Energy and Carbon Reduction Summary

This energy statement has been prepared in support of the development at Willen Road, Newport Pagnell. Local Planning Policy for the development requires that demand reduction measures are implemented to achieve an improvement of 39% carbon, over Part L1A 2013 standards.

Provisional SAP assessment of the house types proposed demonstrates that baseline Part L compliant emissions for the development will be 1175130 kgCO₂ per annum, with an energy demand of 6018085 kWh per annum.

From this baseline, further energy demand reduction has been prioritised as part of the widely supported 'fabric first' approach. The benefits to the resident of this approach have been discussed in detail, which include an improvement in thermal comfort, lower energy bills, reducing the risk of fuel poverty and minimal maintenance requirements. These benefits are realised alongside the crucial aspect of the long-term reduction in energy demand that is built into the lifetime of the dwellings.

Applying this approach through a combination of the fabric specification proposed, detailing to avoid thermal bridging, reducing air leakage and employing passive and active design measures, the dwellings will secure a saving in CO₂ emissions of 56776 kgCO₂/year, equating to an energy demand reduction of 311731 kWh/year.

In order to meet the 39% carbon requirement, a further 401525 kg CO₂ will need to be offset, which is achieved through the strategy set out in this statement.

The energy statement determines the feasibility of a range of LZC technologies. The development will apply 1255kWp Solar PV in order to meet local authority planning policy, providing a 1143175kWh energy and 401895 kgCO₂ carbon reduction.

The proposed strategy will provide a 39.03% carbon reduction over a development built to comply with the CO₂ targets under the latest revision of the Building Regulations, Part L1A 2013. This also represents a 24.18% energy demand reduction.

12. Sustainable Design Considerations

Energy efficient design is only a part of a sustainable design strategy for modern homes. This section of the statement outlines the considerations that have been made to ensure that the proposed development will be designed and constructed to the highest standard of sustainable living.

12.1 Energy Conservation

Further energy consumption reductions are achieved through the provision of energy efficient white goods (where applicable) ensuring that all appliances have a minimum energy rating of A+. Energy display monitoring devices & smart meters are designed to show the energy consumption within the home. This will help the occupants to develop an understanding of the energy they use and therefore enable them to improve their habits to reduce energy consumption.

12.2 Management

A suitably designed Home User Guide will be produced and made available to all new occupants. It will provide information on the energy efficient design of the dwellings, how to operate the services and equipment in the home and provide important information about the remainder of the site and its surroundings.

12.3 Household Waste

All dwellings will be provided with external space for household waste, compliant with British Standard BS5906, i.e.: 100ltrs volume for a single bedroom dwelling, with a further 70ltrs for each additional bedroom. Additional space for green recycling bins, blue bags, and food waste bins, will also be provided in accordance with the local recycling initiatives.

12.4 Air Quality

The quality of the air in modern homes is perhaps not something many people think about, but the reality is that if this is not managed appropriately it can impact on health. The incidence of asthma and other breathing complaints is on the increase and it is widely accepted that the indoor environment can exacerbate and bring on such problems in many people whether or not they have suffered in the past. Dwellings have been designed in accordance with Part F building regulations to ensure adequate ventilation.

12.5 Pollution

To reduce the amount of greenhouse gas emissions associated with the development, all insulation used in the building fabric and services shall have a Global Warming Potential (GWP) of less than 5. By selecting suitable insulation products, the development is helping to minimise future effects of global Climate Change. The proposed gas fired system boilers will have a NOx rating of under 40mg/kWh.

12.6 Safety and security

Safety & security is a primary factor when designing a new home these days. This development has been designed to ensure that suitable security measures have been considered, including security lighting fitted with PIR (Photo Infra Red) sensors, suitable locks on all windows and external doors, and the bike store is fitted with suitable security measures.

12.7 Construction considerations

This site will benefit from the most stringent of health and safety regulations, by seeking registration with considerate constructors. A NEBOSH accredited health and safety manager will ensure all measures are adhered to and followed. Including reducing sound and dust pollution during the construction phase, allocating appropriate parking and traffic control for the construction teams and all heavy machinery. Ensuring adequate temporary works design and coordination is applied in accordance with the HSE.



13. Water Conservation

Performance target:

110 ltrs pp/d

Installation type	Unit of measure	Capacity/ flow rate	Use Factor	Fixed Use	Litres/ person/day		
WC (dual flush)	Full flush volume	4	1.46	0	5.84		
	Part flush volume	2	2.96	0	5.92		
Taps (excluding kitchen/utility room taps)	Flow rate (l/min)	5	1.58	1.58	9.48		
Bath (where shower also present)	Capacity to overflow	160	0.11	0	17.60		
Shower (where bath also present)	Flow rate (l/min)	9	4.37	0	39.33		
Bath Only	Capacity to overflow	N/A	0.5	0	0.00		
Shower only	Flow rate (l/min)	N/A	5.6	0	0.00		
Kitchen/utility room sink taps	Flow rate (l/min)	8	0.44	10.36	13.88		
Washing machine	Litres/kg dry load	8.17	2.1	0	17.16		
Dishwasher	Litres/place setting	1.25	3.6	0	4.50		
Waste disposal unit	Litres/use	N/A	3.08	0	0.00		
Water softener	Ltrs/person/day	N/A	0	0	0.00		
Greywater Contribution	N/A	Rainwater Contribution	N/A	Normalisation factor	0.91	Total calculated use	113.71
Normalised total water consumption				103.47		Total Water Consumption	108.47
External water use		5.00					
<p>The calculation methodology is to be used to assess compliance against the water performance targets in Regulation 36. It is not a design tool for water supply and drainage systems. It is also not capable of calculating the actual potable water consumption of a new dwelling. Behaviour and changing behaviour can also have an effect on the amount of potable water used throughout a home. The calculation methodology uses the water consumption figures provided from manufacturers' product details. Where details have not been provided, figures have been used to achieve compliance. These must be met in order to satisfy the Part G Calculation.</p>						Part G 17.K Compliance?	Yes
						Performance Target Met	Yes

14. Sustainable Urban Drainage Systems (SuDS)

SuDS are designed to manage excess rainwater where it falls rather than the traditional approach of channelling it through drains. Examples include ponds, reed beds, drainage channels and porous driveways. Local planning policies and decisions on planning applications relation to major developments (those of 10 dwellings or more; or equivalent non-residential or mixed development) to ensure that sustainable drainage systems for the management of run-off are put in place, unless demonstrated to be inappropriate.

The drainage system must be designed so that, unless an area is designated to hold and/or convey water as part of the design, flooding does not occur on any part of the site for a 1 in 30 year rainfall event, a 1 in 100 year rainfall event are managed in exceedance routes that minimise the risks to people and property.


For developments which were previously developed, the peak runoff rate from the development to any drain, sewer or surface water body for the 1 in 1 year rainfall event and the 1 in 100 year rainfall event must be as close as reasonably practicable to the greenfield runoff rate from the development for the same rainfall event, but should never exceed the rate of discharge from the development prior to redevelopment for that event. This development falls into Flood Risk Zone 1, having a low probability of flooding (Land shown in light blue on the Flood Map below).

For developments in Flood Zone 2 the Government's NPPF and the accompanying online Planning Practice Guidance (PPG) on Flood Risk and Coastal Change provide tests and thresholds to protect property from flooding which all local planning authorities (LPAs) are expected to follow. Where these tests/thresholds are not met, new development should not be allowed. Together, the NPPF and the PPG provide for what is known as a "sequential test" designed to ensure that areas at little or no risk of flooding from any source are developed in preference to areas at higher risk. The aim is to keep development out of medium and high flood risk areas (Flood Zones 2 and 3) and other areas affected by other sources of flooding where possible. A sequential approach should be used in areas known to be at risk from any form of flooding. Where there are no reasonably available sites in Flood Zone 1, local planning authorities can then consider reasonably available sites in Flood Zone 2, applying what is known as "the exception test".

Only where there are no reasonably available sites in Flood Zones 1 or 2 should the suitability of sites in Flood Zone 3 be considered, taking into account the flood risk vulnerability of land uses and applying the exception test if required. The exception test is set out in the NPPF as follows: -

- it must be demonstrated that the development provides wider sustainability benefits to the community that outweigh flood risk, informed by a Strategic Flood Risk Assessment where one has been prepared; and
- a site-specific flood risk assessment must demonstrate that the development will be safe for its lifetime taking account of the vulnerability of its users, without increasing flood risk elsewhere, and, where possible, will reduce flood risk overall.

Both elements of the test will have to be passed for development to be allocated or permitted.

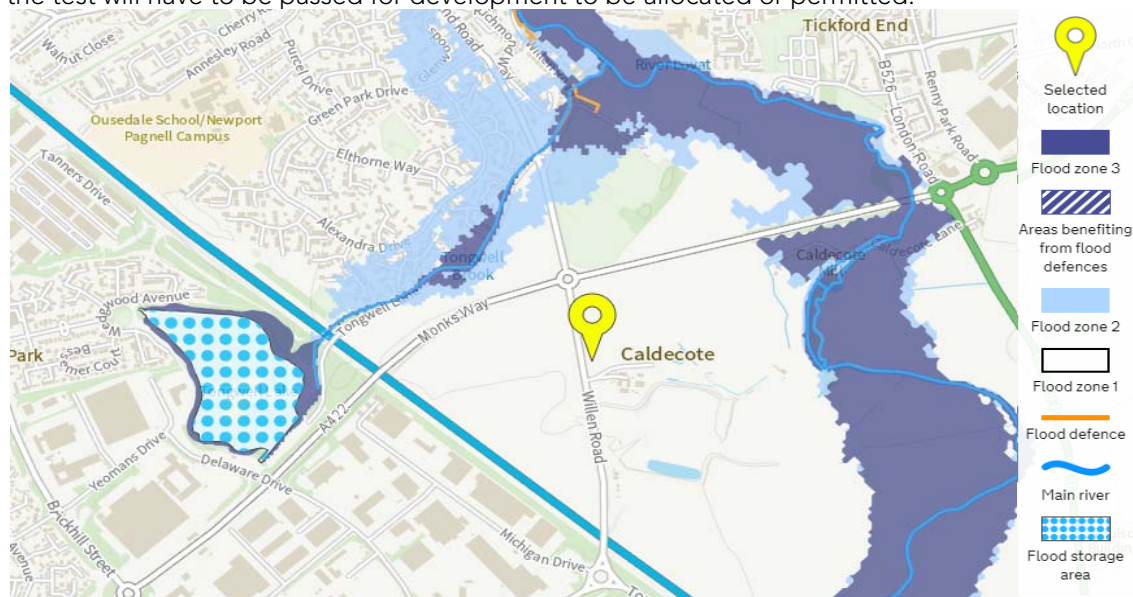

15. Lighting and natural light

High quality lighting design is an important and desirable feature that supports how you feel and use your home. Providing adequate access to and control of lighting within your home is a basic function that contributes to our comfort and health.

Careful consideration will be made to ensure that background lighting levels will meet the requirements as set out in CIBSE Internal Lighting Guide & SLL Lighting Guide with the following targets set as shown in Table 5.0.

All internal and external lighting will be supplied by energy efficient fittings with LED lamps which will offer luminous efficacy greater than 45 lumens per circuit Watt and greater than 60 lumens per circuit Watt for the non-domestic unit.

The dwellings have been designed to maximise the level of daylight into the Kitchens, and Living Rooms which will help to achieve the required average daylight factors (ADF's) and will have a view of sky.

ROOM TYPE	LUX LEVEL
Entrance Lobby	150
Kitchen	500
Living Space	200
Bathroom	200
Bedrooms	150

Table 5.0 – CIBSE Internal Lighting Guide - recommended lighting levels

16. Materials

Building and construction activities worldwide consume 3 billion tons of raw materials each year, which account for approximately 50% of total global consumption. Using green/sustainable building materials and products promotes conservation of dwindling non-renewable resources. In addition, integrating sustainable building materials into building projects can help reduce the environmental impacts associated with the extraction, transport, processing, fabrication, installation, reuse, recycling, and disposal of these source materials.

The aim for the proposed development will be for its overall environmental impact to be minimised through the specification of sustainable materials and components.

Materials with low overall environmental impact will be selected for the key building elements in the proposed scheme, targeting A/A+ ratings where possible, from the BRE 'Green Guide to Specification'. The Green Guide rates the environmental impact of different materials and components over their lifecycle, taking into account factors like toxicity, ozone depletion, extraction, ease of recycling, waste disposal etc.

Materials will be selected where possible from responsible suppliers, who can provide environmental certificates for the manufacturing processes of their products (including the supply chain processes), i.e. ISO14001, BES6001 or equivalent certificates.

Recycled materials will be specified where possible and it will be ensured that for all new raw materials being used, as much as possible can be recycled at the end of the buildings' life.

Specifying materials with a high-recycled content is a method of saving processing or manufacturing energy. The recycled content of a material can be described as either post-consumer or post-industrial to indicate at what point in the life cycle a material is reclaimed.

Some typical building materials that can contain a high percentage of recycled material include reinforcing and framing steel, concrete masonry units, gypsum wallboard, acoustic ceiling panels and their suspension system.

Opportunities for reusing materials that may be available from the demolition of existing buildings on the site will be identified.

17. Site Location & Public Transport

The transport of people between buildings is the second largest source of CO₂ emissions in the UK after energy use in buildings, and remains the main source of many local pollutants. Energy use and emissions from transport are growing at 4% per year, and at the same time, the effects of climate change are becoming more severe; there will be greater pressure to control CO₂ emissions from transport.

In addition to energy use and CO₂ emissions, in areas of high transport usage there is likely to be an increase in congestion, noise and airborne pollution, which have an adverse impact on the health and quality of life of the local inhabitants. The proposed buildings location and design will aim to minimise the use of private cars and the associated impacts. A travel plan will be generated to cover all aspects of travel to avoid using cars.

Where possible ducting to be provided to allow future electric car-charge connection. Ducting subject to agreement with the electrical infrastructure and detailed electrical design.

There will be a requirement to consider improvements to the footpaths and create cycle routes improving existing routes connecting to public transport.